

# LDEE5B Commercial Dryer



## 9 KG TOUCH CONTROL ELECTRIC DRYER

### Features and Benefits

- Energy saving 'Automatic Drying' function prevents over drying.
- Same 'Speed Queen' premium quality commercial components, fitted into a sleek stylish design actuated by the home style controls we are all familiar with.
- Front controls matching the LFNE5B front load washer for perfect paring of both capacity and style.
- 4,000 w heater element for fast, efficient drying.

### SPECIFICATIONS

DIMENSIONS	
CAPACITY	9 kg
WIDTH	683 mm
DEPTH	711 mm
HEIGHT	1,092 mm
DRUM VOLUME	198 litres
NET WEIGHT	66 kg
OPERATION	
CYCLES	6 cycles, 3 fabric temperatures
CYCLE INDICATOR	Yes & Timer Display
CYCLE TIME	10 - 70 min or auto dry
CONTROLS	Electronic E MECH
ACTIVATION	Push Button Controls
HEAT INPUT	4,000 w
MOTOR	1/3 hp, 0.25 kw
POWER SUPPLY	20 amp single phase
CONSTRUCTION	
DRUM	Galvanised
OUTER CABINET	Steel



# LDEE5B Commercial Dryer



## TECHNICAL SPECIFICATIONS

### UTILITIES

20 AMP SINGLE PHASE 240 V 50 HZ

20 AMP CIRCUIT-BREAKER REQUIRED

1.8 M POWER LEAD

FLUE DIAMETER 102 MM (4 INCH)

AIR FLOW 85 LITERS / SEC

MAX POWER DRAW 4,000 W / HR

OPTIONAL RIGHT OR LEFT SIDE VENTING

### SHIPPING DIMENSIONS

WEIGHT 70 kg


HEIGHT 1,156 mm

WIDTH 737 mm

DEPTH 832mm

0.71 m<sup>3</sup>

A	* 1027 mm [40.42 in.]
B	* 1006 mm [39.61 in.]
C	* 392 mm [15.44 in.]
D	* 102 mm [4 in.]
E	391 mm [15.4 in.]
F	683 mm [26.875 in.]
G	* 114 mm [4.5 in.]
H	10 mm [0.4 in.]
I	203 mm [8 in.]
J	711 mm [28 in.]
K	597 mm [23.5 in.]

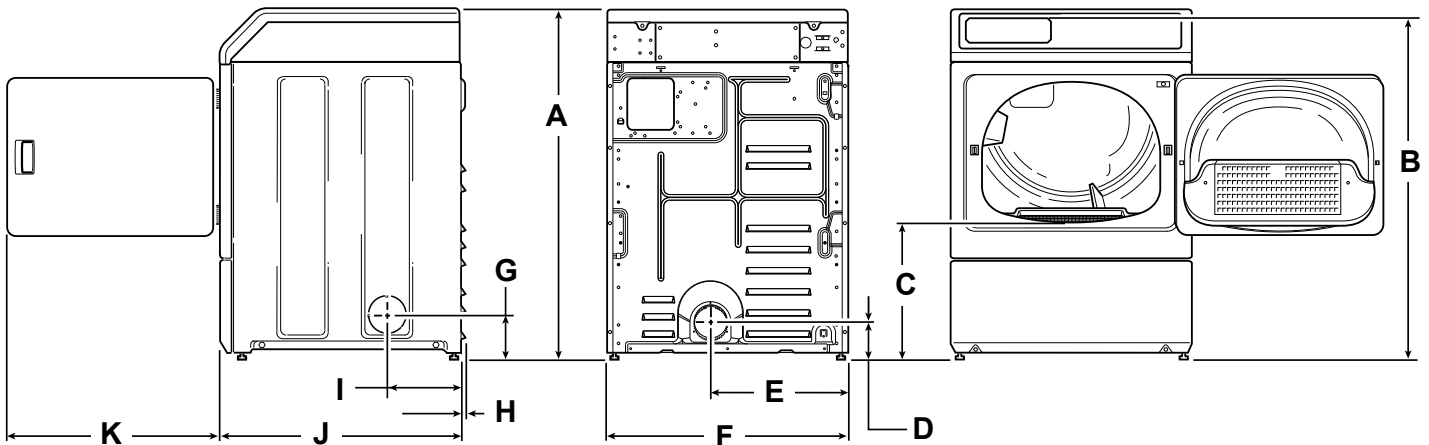

### WESTERN AUSTRALIA

7/15 Walters Drive  
Osbourne Park WA 6017  
T: 08 9445 7744  
enquiry@speedqueenwa.com.au

### NEW SOUTH WALES & ACT

245 Rawson Street  
Auburn NSW 2144  
T: 02 9748 2155  
enquiry@speedqueenlaundry.com.au

### SOUTH AUSTRALIA & NT

385-387 Main North Road  
Enfield SA 5085  
T: 08 7095 0336  
sa@speedqueenlaundry.com.au

### QUEENSLAND

2/18 Gravel Pit Road  
Darra QLD 4076  
T: 07 3376 3869 \*Home retail  
qld@speedqueenlaundry.com.au

\*For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice.